KIT PART NUMBER 1670025 INSTRUCTIONS FOR INSTALLING REPLACEMENT TRAY HARNESS COMPONENTS IN A SNACK OR REFRESHMENT CENTER

CHECK THE PARTS RECEIVED IN THE KIT WITH THE PARTS LIST IN THESE INSTRUCTIONS. IF ANY PARTS ARE MISSING, CONTACT THE NATIONAL VENDORS PARTS DEPARTMENT IMMEDIATELY.


Read these instructions carefully before installing the kit. Keep these instructions for part numbers and for future reference.

This kit contains the following:

PART NUMBER	DESCRIPTION	QUANTITY
1571250	SHIELD - TRAY RAIL/PCB	1
9989821	BUSHING - 0.512 DIAMETER	1

- 1. Remove power from your merchandiser.
- 2. Remove products from the tray and remove the tray.
- 3. Remove the right hand side rail, taking care to disconnect the PC board from the machine harness.
- 4. Replace existing bushing with a new bushing (9989821), as shown.
- 5. Remove and discard the existing plastic shield from the rail.
- 6. Install the new shield (1571250).
- 7. Replace the rail and tray in the machine.
- 8. Load products back into the tray and place the machine back into service

Page 1 of 2 1670036

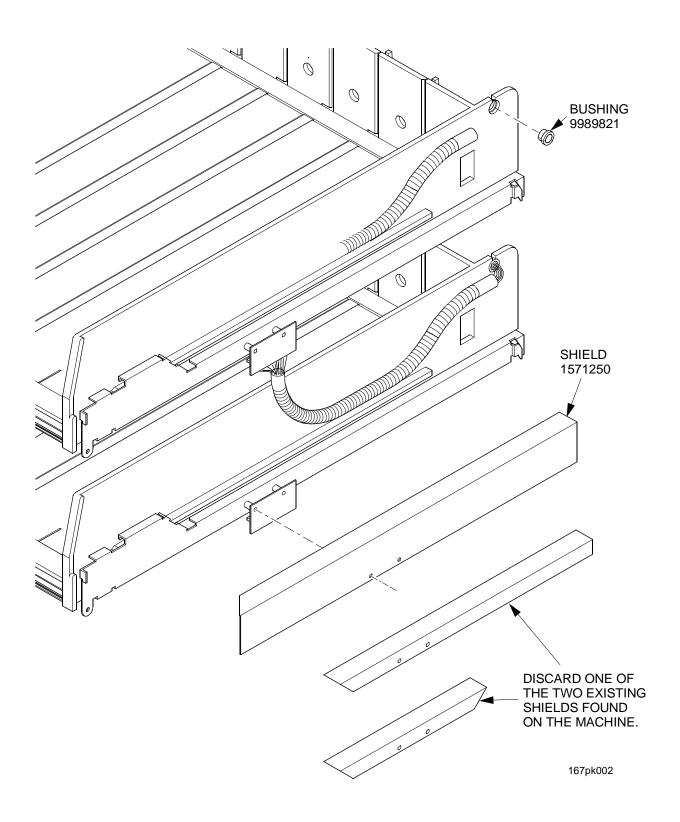

Page 2 of 2