

**INSTRUCTION FOR INSTALLING A ANTI-PILFERAGE DOOR ROLLER KIT IN A
NATIONAL VENDORS® SHOWCASE 141, 142, 143, 144 AND 150 LSV SPIRAL SNACK
MERCHANDISERS**

CHECK THE PARTS RECEIVED IN THE KIT WITH THE PARTS LIST IN THESE INSTRUCTIONS. FIGURE 1 SHOWS ALL THE PARTS IN THE KIT. IF ANY PARTS ARE MISSING, CONTACT NATIONAL VENDORS' PARTS DEPARTMENT IMMEDIATELY.

These instructions cover the procedure for installing a Anti-Pilferage Door Roller Kit in a 141, 142, 143, 144 and LSV-150 Spiral Snack Merchandiser.

Read the instruction carefully and thoroughly before installing the kit. Retain these instructions for part number and installation information. Kit, part number 143-2067, contains the following parts:

Part Number	Description	Quantity
141-2046	Nut-No.8-32 Self Locking Black	2
141-2090	Stud - Door Actuator	2
143-2065	Roller - Anti-Pilferage Door	2
558-0072	Lubricant -1.0	1
143-2066	Instruction Installation	1

Special Tool Required
Screwdriver
Needlenose Pliers

2. Unlock and fully open the Cabinet Door to expose the Delivery Pan Assembly.
3. Ensure that the Door Support Leg is in position.
4. Using screwdriver and pliers, remove from the Delivery Pan Assembly the following parts: the Self-Locking Nuts, No.8-32, black, 141-2046 (2); the Door Actuator Studs, 141-2090 (2); and the Door Actuator Rollers, 141-2090 (2). (See Figure 2.)

NOTE

Take care to observe the exact positions of all parts removed from the Merchandiser.

5. Remove the R.H. and L.H. Actuator Plate and Roller Assemblies, 141-2094 (1) and 141-2095 (1); the Actuator Plate Pivot Studs, 141-2045 (2); and the No.10-32 Self-Locking Nuts, 140-7048 (2). (See Figure 2.)

WARNING

1. Before installing the Kit, insure that the Cabinet Door is securely blocked.
2. If the Interlock Switch is pushed in or pulled out, the Merchandiser is fully operational and touching mechanical or electrical parts can result in injury. For maximum safety, disconnect the Merchandiser Service Cord before installing this kit.

A. PARTS REMOVAL

1. Disconnect the Merchandiser Service Cord from the receptacle.

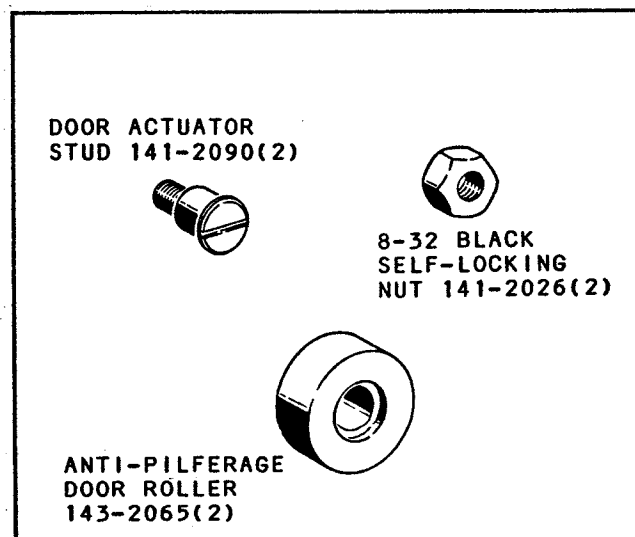


FIGURE 1

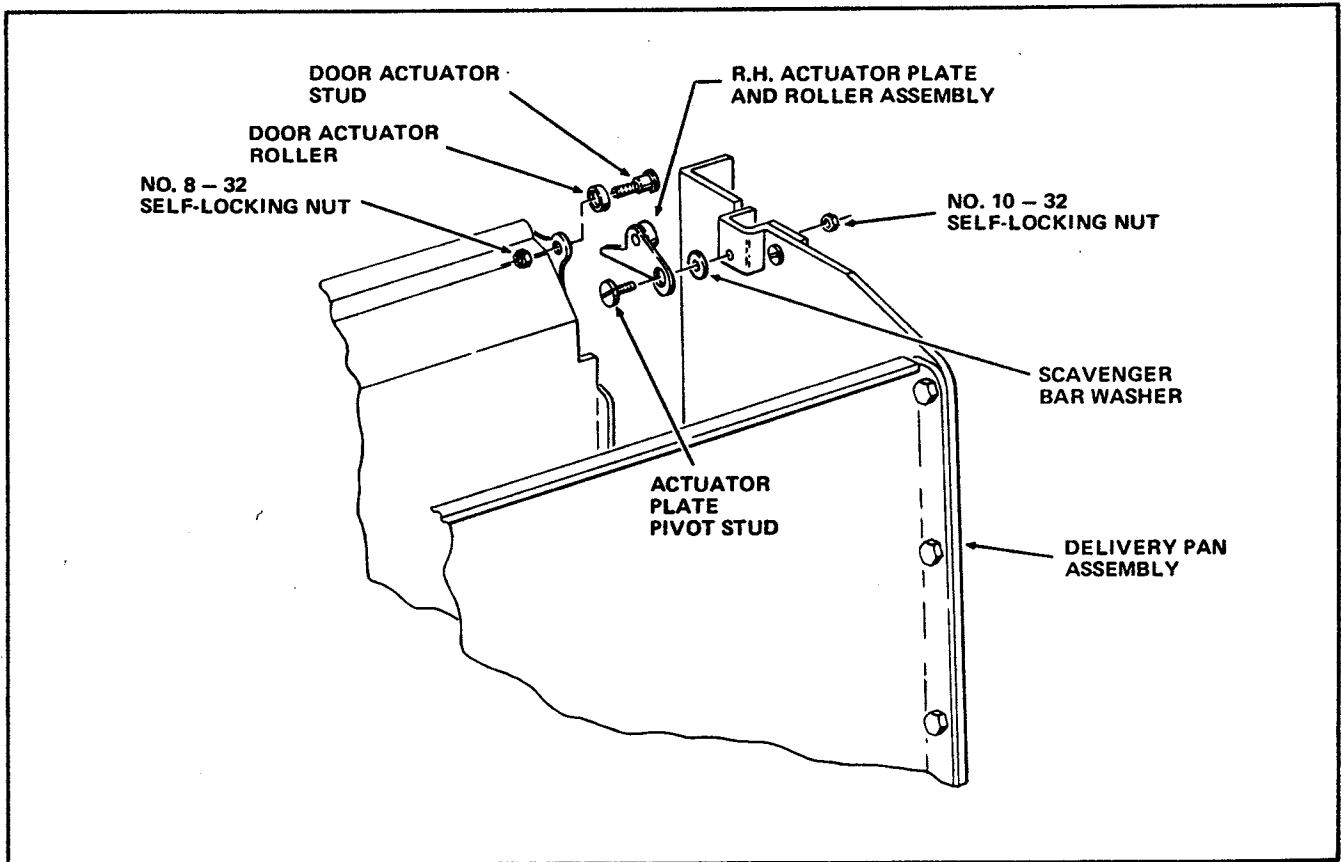


FIGURE 2

B. KIT INSTALLATION

1. Using screwdriver and pliers, install the new style parts included in the Kit: the Door Actuator studs, 141-2090 (2), and Door Actuator Rollers, 143-2065 (2), attaching them with the No.8-32 Self-Locking Nuts, 141-2046 (2), removed in step A-4; and the R.H. and L.H. Actuator Plate and Roller Assemblies, 141-2094 (1) and 141-2095 (1), attaching these parts with the Actuator

Pivot Studs, 141-2045 (2), and No.10-32 Self-Locking Nuts, 140-2048 (2), removed in step A-5.

2. Apply light coat of lubricant part number 558-0072, that is included in the kit, to Door Actuator Rollers No.143-2065.
3. Close the Cabinet Door.
4. Connect the Merchandiser Service Cord to the receptacle.