


Supplement to 1670015 (Gum & Mint Setup Guide)

1. Refer to the figure. Remove the glass retainer.
2. Insert the support rod (1479140) into the prop rod support (1572027) as shown.
3. Using the screws provided (1170206), attach the support rod retainer (1572028) and the prop rod support (1572027) to the glass retainer.
4. Replace the glass retainer.

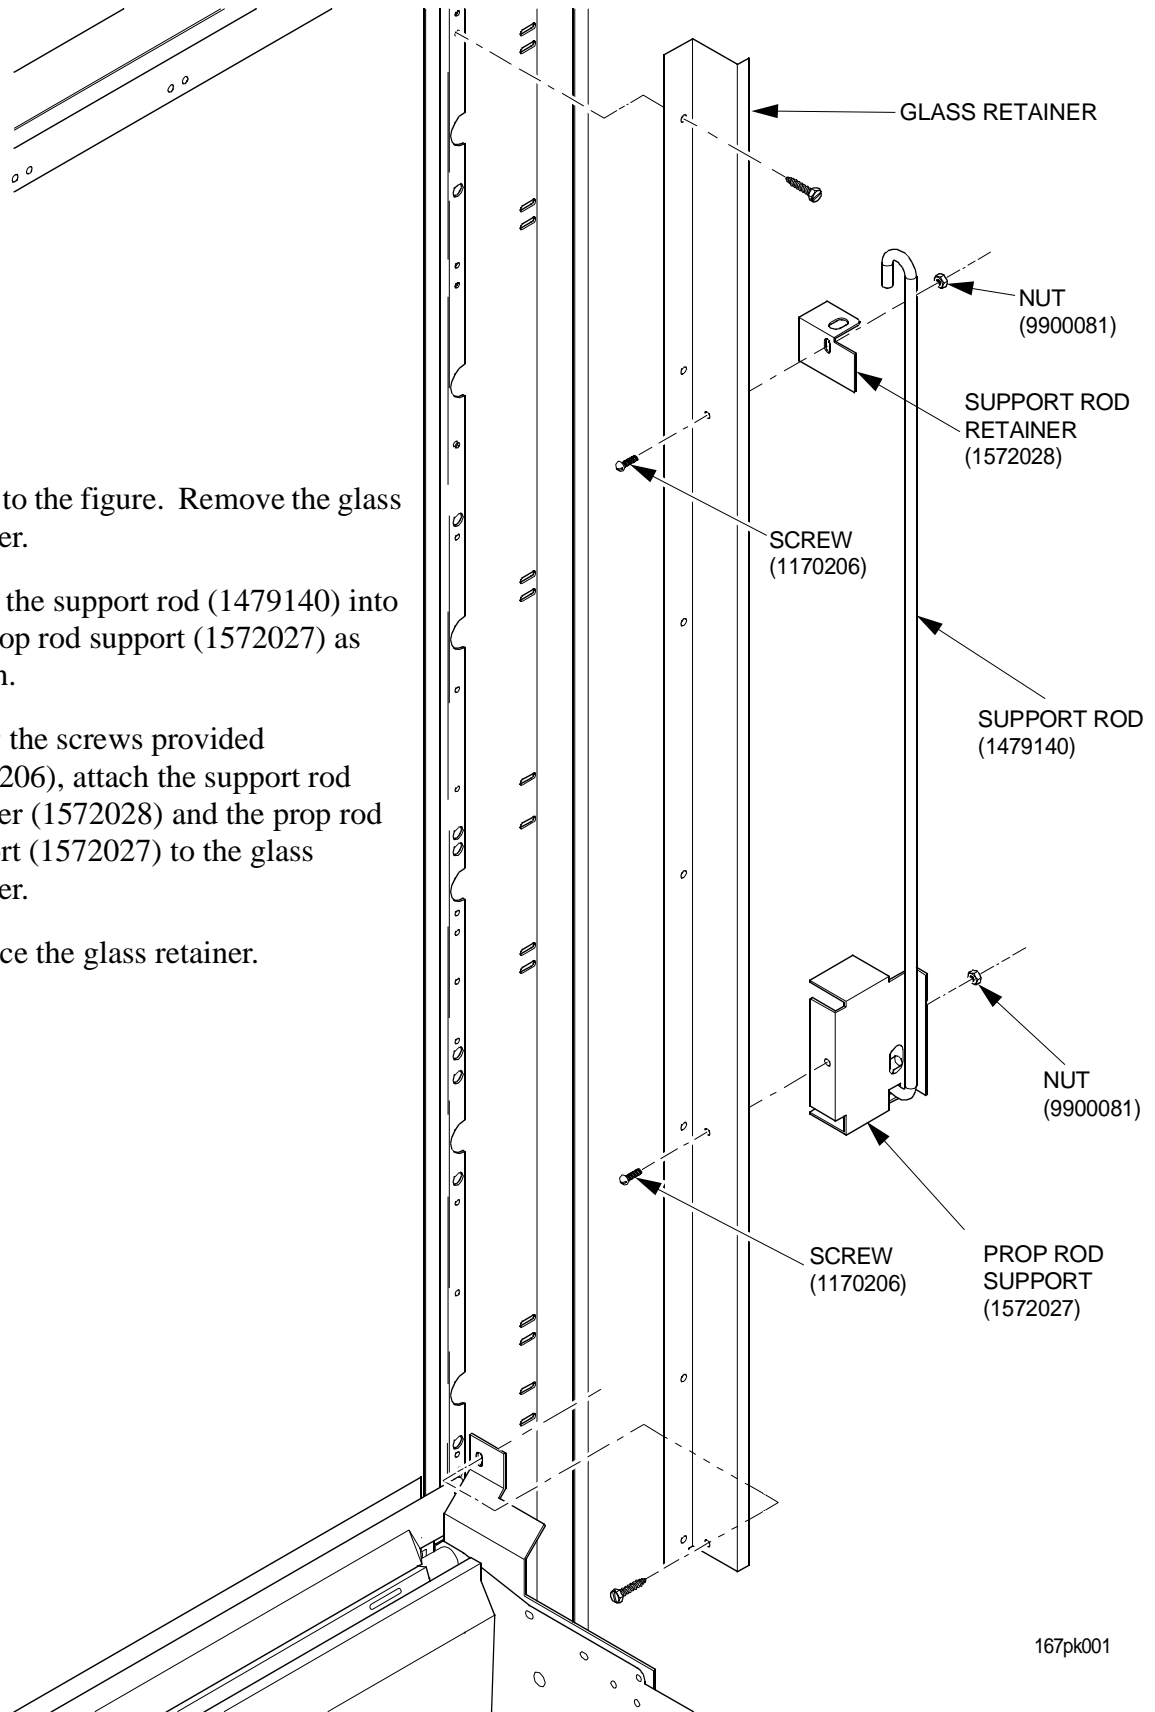

167pk001