

# Dixie-Narco®



Lawrence Street  
Ranson, West Virginia 25438

(304) 725-34  
(800) 624-061

## Service Bulletin # 380

Date: May 9, 1989

MODELS: Coke Landscape Only

SUBJECT: Adapter plates for control panel when supplying welded assembly main doors.

REASON: To utilize one (1) height welded assembly main door for each Landscape Coke cabinet by the use of adapter plates. Adapter, when required will be factory installed.

TEMPLATE: A template will accompany the welded assembly door.

DO THIS: Place the bottom of U shaped template onto the bottom offset of the plastic control panel. Drill four (4) 7/32" holes four places if all four are needed. Align holes with studs on door and secure. Secure studs at top of adapter thru existing holes at bottom of plastic control panel.

### ADAPTERS AND

TEMPLATE: B432,010,530.03 Adapter Plate Control Panel (replaces 2 buttons)  
B444,010,010.03 Adapter Plate Control Panel (replaces 1 button)  
B447,010,010.03 Adapter Plate Control Panel (replaces 3 buttons)  
B448,010,050.03 Adapter Plate Control Panel (replaces 4 buttons)  
A432,010,540.03 Template-Adapter Plate Control Panel

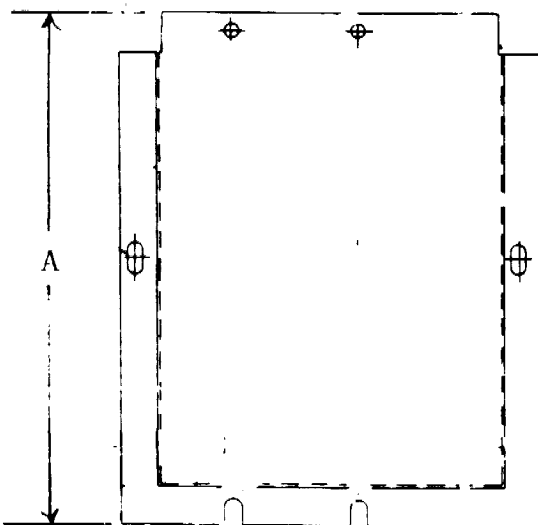


Figure 2

A - 4 15/16" - B447,010,010.03  
A - 6 7/16" - B448,010,050.03  
Adapter Plates

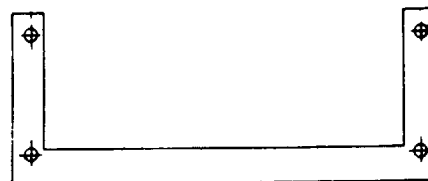


Figure 1  
Template

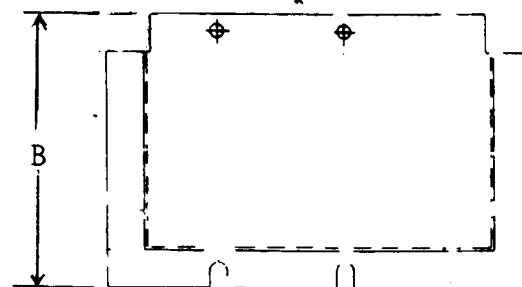


Figure 3

B - 1 15/16" - B444,010,010.03  
B - 3 7/16" - B432,010,530.03  
Adapter Plates