

DIXIE-NARCO, INC.
SERVICE BULLETIN #120

Date: 9/25/70

MODELS: All Executive Venders
Mark III & IVD Venders


REASON: To provide a more durable coin insert casting.

SUBJECT: Installation Instructions

ORDER AS: B/M99,011,000.04

DO THIS:

1. Remove plastic coin insert and coin chute. Remove correct change lamp and bracket, cutting leads from lamp socket. Strip & twist correct change lamp leads remaining on harness to fit butt connectors (on leads from new lamp).
2. Install die cast coin insert, securing in place with new coin chute bracket, keps nuts, and two tee bolts through bottom holes in casting. Secure top corners with retainer strip and sheet metal screws.
3. Join butt connectors on lamp leads to lamp lead wires in harness by crimping.
4. Check alignment of bottom of coin chute with hopper on changer. Coin chute bracket may be bent to align chute with hopper.
5. Apply new instruction sign.

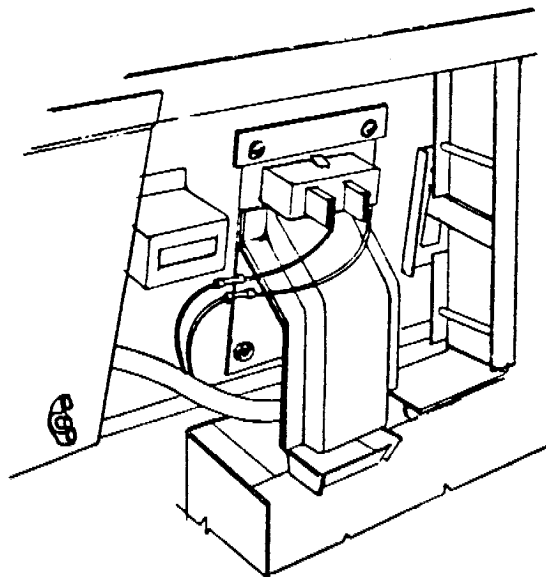

KIT CONSISTS OF:

1	C801,200,860.21	Coin Insert - Die Cast
1	904,700,180.01	Correct change lamp
2	A99,011,200.03	Lead - correct change lamp
1	A99,011,300.03	S/A - coin chute
1	A143,051,220.13	Retainer - Galv. - 5/8 x 3
2	900,301,520.01	Sheet metal screw
2	900,400,350.01	Tee bolt
2	900,800,500.01	Keps nut
1	903,802,430.21	10c Instruction Sign

Dixie-Narco, Inc.
Service Department