

DIXIE-NARCO, INC.
SERVICE BULLETIN #138

Date: January 5, 1972

MODELS: All Serpentine Can Venders With The Open Type Relay
(Guardian - Blue Coil)

IF SERPENTINE IS ALREADY EQUIPPED WITH RBM RELAY, THIS
BULLETIN MAY BE DISREGARDED.

SUBJECT: Installation of RBM Open Type Relay

REASON: The Guardian Relay has been phased out and is being replaced
with the smaller RBM Relay for purpose of standardization.

TO INSTALL

DO THIS:

1. Refer to Figure 1, RBM Relay.
2. Remove the Guardian Relay.
3. Hold the RBM Relay in the position shown in
Figure 1. (Coil down).
4. Attach the appropriate "wire lead" to the terminals
on the relay as shown.
5. Install New Wiring Diagram - A903, 804,710.11
and secure relay in position with screw.

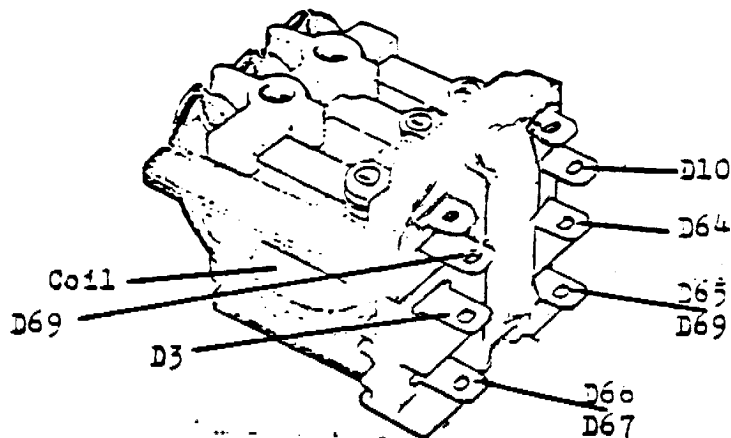


Figure 1. RBM Relay

KIT CONSISTS OF:

- | | | |
|---|-----------------|--------------------------------|
| 1 | 804,200,140.01 | RBM Relay |
| 1 | A903,804,710.11 | Wiring Diagram |
| 1 | 900,200,660.01 | Sems Machine Screw, 6-32 x 3/8 |

Dixie-Narco, Inc.
Service Department