
**KIT PART NUMBER 4322251 AND 4322253
INSTRUCTIONS FOR INSTALLING LAMP ASSEMBLIES**

CHECK THE PARTS RECEIVED IN THE KIT WITH THE PARTS LIST IN THESE INSTRUCTIONS. IF ANY PARTS ARE MISSING, CONTACT THE NATIONAL VENDORS PARTS DEPARTMENT IMMEDIATELY.


**Read these instructions carefully before installing the kit.
Keep these instructions for part numbers and for future reference.**

THIS KIT CONTAINS THE FOLLOWING :

PART NUMBER	DESCRIPTION	QUANTITY
4322255	BRACKET & LAMP HARNESS ASSY (ONLY FOR 110V KITS)	1
4322256	BRACKET & LAMP HARNESS ASSY (ONLY FOR 230V KITS)	1
4322252	KIT INSTRUCTIONS	1

1. Turn machines power switch off.
2. Open monetary door.
3. Open main cabinet compartment door.
4. Disconnect harness for light assembly. This harness connection is found near the ballast behind the metal plate screwed to the inside of the door.
5. Feed harness through the small hole located on the lower right hand side of the door.
6. Remove light harness from clamps located at top right hand side of door.
7. Remove three screws and “L” bracket found at the top of the door.
8. Remove both light bulbs and save.
9. Remove 4 screws securing right and left side light brackets.
10. Remove light bracket assembly from machine.
11. Secure light brackets part #4322255 or part #4322256 to the left and right side of the machine.
12. Place harness in slot at the top of the door, then secure by reinstalling “L” bracket to top of door.
13. Secure harness with clamps to the top left hand side of the door.

14. Feed harness connector through hole and plug the connector into harness found next to the ballast assembly.
15. Install light bulbs into sockets of light assembly.
16. Restore power to machine and verify proper power to lights.

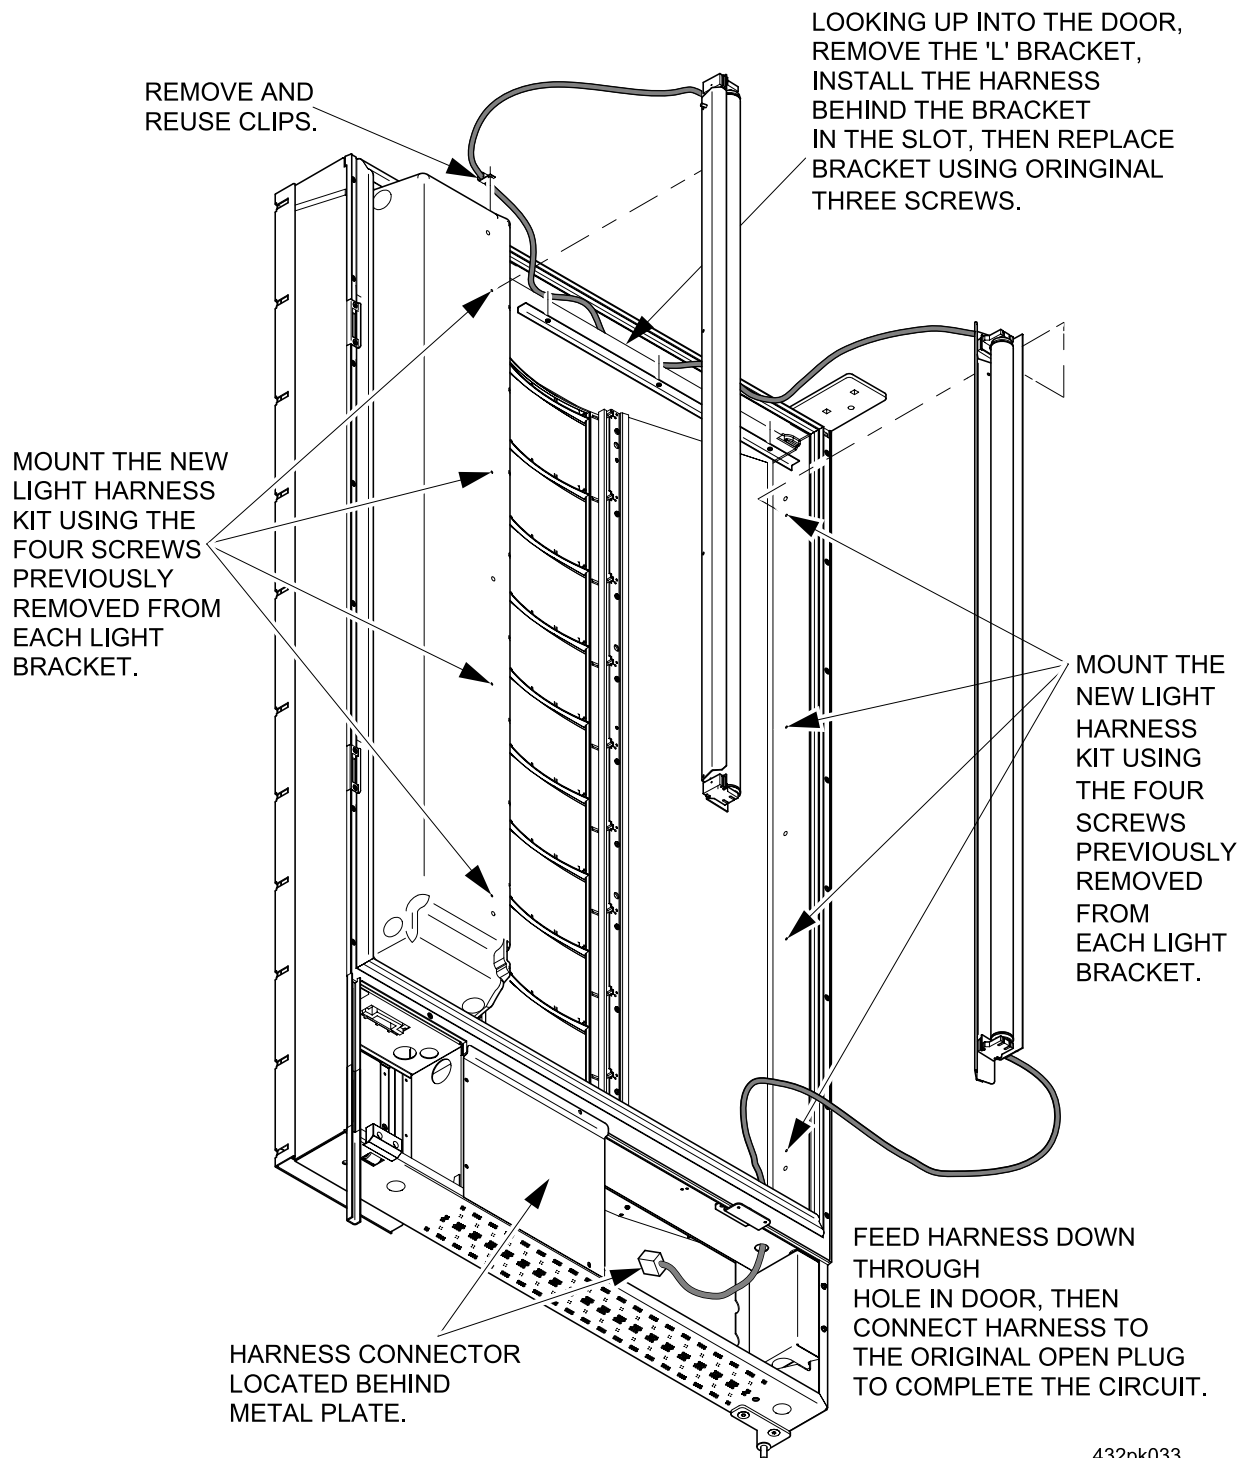

432pk033