



KIT PART NUMBER 6400086

**INSTRUCTIONS FOR DELIMING THE HOT WATER TANK
USING THE EVERPURE JT FLUSHING CAN**

CHECK THE PARTS RECEIVED IN THE KIT WITH THE PARTS LIST IN THESE INSTRUCTIONS. IF ANY PARTS ARE MISSING, CONTACT THE NATIONAL VENDORS PARTS DEPARTMENT IMMEDIATELY.

**Read these instructions carefully before installing the kit.
Keep these instructions for part numbers and for future reference.**

This kit contains the following:

INDEX	PART NUMBER	DESCRIPTION	QUANTITY
-	6408157	EVERPURE - JT FLUSHING CAN	1
-	6400137	INSTRUCTIONS	1

This Everpure JT Flushing Can is to be used with the Everpure filter system option ordered with your machine. It will provide an easy method of introducing Everpure ScaleKleen into your machine for deliming the hot water tank.

1. Remove the center core of the JT Flushing Can (figure 1) by pulling it straight out of the body.

NOTE

Some gentle prying action may be needed to free the center core from the flushing can body. Take care not to damage the plastic parts or the O-rings.

2. Pour the recommended amount of Everpure ScaleKleen (National Vendors Part Number 6408156) required for your application in to the Flushing Can. See the following table:

Machine Model	Hot Water Tank Capacity	ScaleKleen Quantity*
Cafe' System 7	2.2 gal	1.1 lb (½ of a 2.2 lb package)
Hot Drink Center/Euro Coffee	5.0 gal	2.2 lb

* This quantity is for the initial de-scaling and will vary with the amount of scale. Use less ScaleKleen for ongoing maintenance and for better water conditions.

3. Replace the center core into the JT Flushing Can.
4. Close the water shutoff valve at the inlet water valve and Everpure filter head assembly.
5. Remove the existing filter cartridge and insert the JT Flushing Can into the filter head. Open the water shutoff valve. Vene several cups of water to draw the ScaleKleen into the hot water tank.



6. Wait 30 to 40 minutes and then rinse the tank thoroughly following the procedure listed below:
 - Close the water shutoff valve.
 - Remove the JT Flushing Can and reinstall the filter cartridge or replace it with a new filter cartridge based on your maintenance schedule.
 - Drain the hot water tank and discard the water and ScaleKleen solution into the local sewer system.
 - Open the water shutoff valve and fill the tank. Close the water shutoff valve and flush the system by draining the tank.
 - Open the water shutoff valve and fill the tank. Thoroughly rinse the valve and tubing system by vending all selections several times.
7. Thoroughly rinse the JT Flushing Can with cold water.
8. Return the machine to service. This completes the deliming procedures.

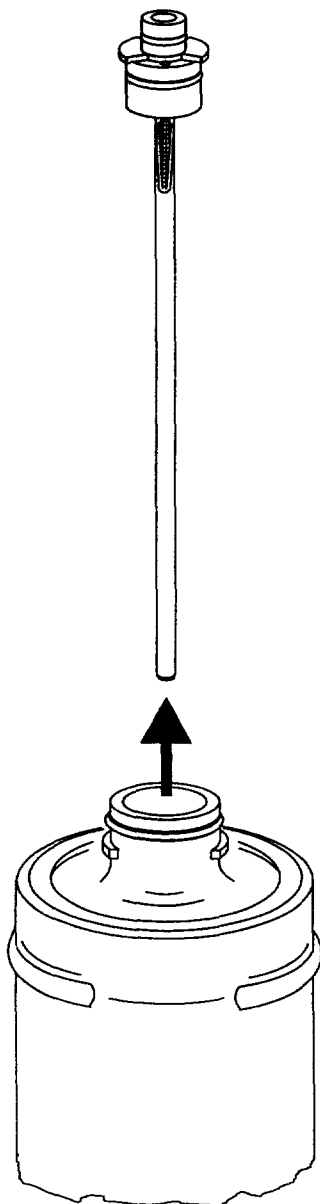


Figure 1