

M051.0

HVV High Security Closure Strip Installation

Models Affected: All HVV Model Venders

Reason: To provide instructions on installing a High Security Closure Strip in an HVV machine.

Parts required per vender: 1 – 614,050,09x.x3 High Security Closure Strip

October 7, 2002

Installation Instructions:

1. Unplug the Vender.
2. Remove the nut securing the Electronic Lock Battery Port on the left side of the delivery port. See Fig. 1.
3. Remove the top two (2) lamps.
4. Remove the Cash Box.
5. Remove the Cash Box Shelf. Note: You will need to remove the Lamp Brackets.
6. Remove the existing Closure Strip by removing the three (3) carriage bolts and nuts that secure it to the Delivery Port.
7. Use a $\frac{3}{4}$ " drill bit and drill the hole in the Delivery Port where the Electronic Lock Battery Port use to be located to make it larger. Be careful not to damage any wiring or parts. See Fig. 1.
8. Install the new High Security Closure Strip. Secure it with the bolts and nuts removed in step 2.
9. Install the Cash Box Shelf. Note: You will need to install the Lamp Brackets back in position.
10. Install the Cash Box.
11. Install the top two (2) lamps.
12. Pass the Electronic Lock Battery Port through the hole drilled in step 7. See Fig. 2.
13. From the back, insert the Electronic Lock Battery Port in the upper left hole of the Closure Strip and secure with the nut removed in step 3. See Fig. 2.
14. Plug in the vender and test the operation of the Electronic Lock with the door open before closing the door.

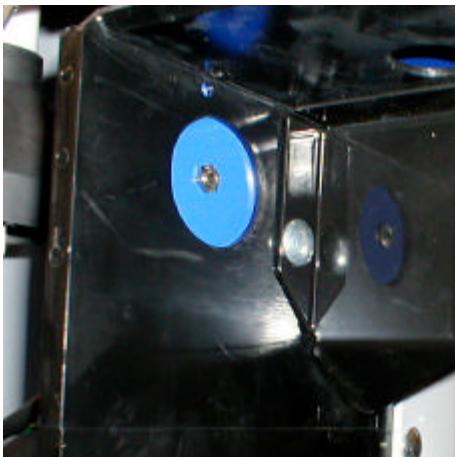


Figure 1

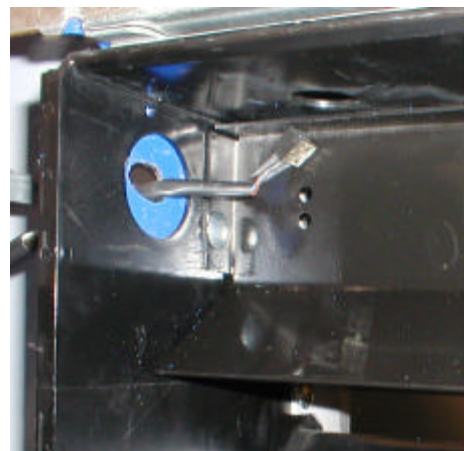


Figure 2