

Dixie-Narco®



Lawrence Street
Ranson, West Virginia 25438

(304) 725-3481
(800) 624-0553

Service Bulletin

233

Date: ~~January 8, 1981~~

Revised: February 3, 1983


MODELS: All Dual Adaptables and 1 1/4" Deeper Dual Adaptables - Narrow Column Only

SUBJECT: Flat Shim with Spring

ORDER AS: B2560.06 W/A Can Retainer Shim (Narrow Column Only) Standard Models
B3050.06 W/A Can Retainer Shim (Narrow Column Only) 1 1/4" Deeper Models

REASON: To provide a Shim that will prevent the rear can from being "rocked" (by tilting vender) from the Narrow Column (only) after the front can has been vended.

- INSTALLATION:
1. Shims are shipped with Springs lying flat. Bend Spring upward until dimension between Spring and Shim is 3/4". See Fig. 1.
 2. Install one (1) Shim as shown in Fig. 2 on right side of Narrow Column Only.
 3. Do Not remove Shim from left side of Narrow Column.

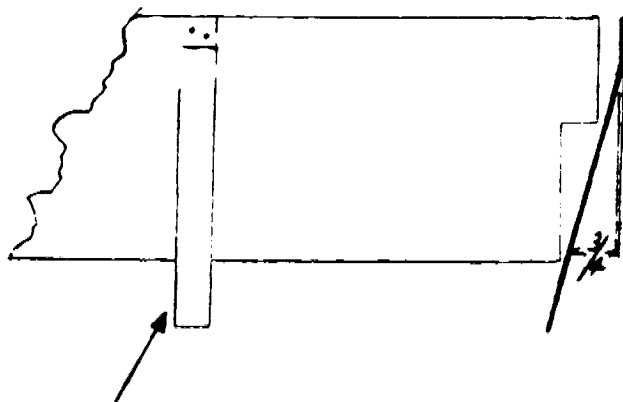

Spring

FIG. 1

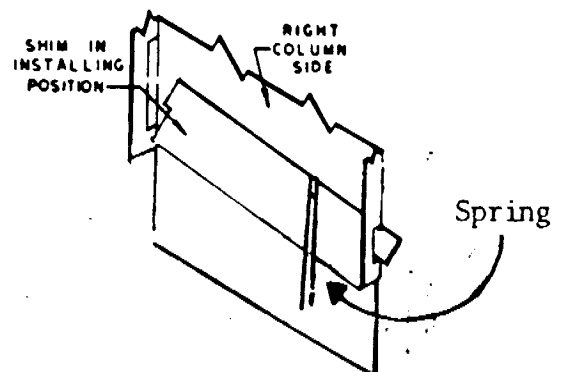


FIG. 2