

# KIT PART NUMBER 4273105 INSTRUCTIONS FOR INSTALLING A FIELD UPGRADE KIT IN A FOODKING MERCHANDISER

CHECK THE PARTS RECEIVED IN THE KIT WITH THE PARTS LIST IN THESE INSTRUCTIONS. IF ANY PARTS ARE MISSING, CONTACT THE GPL PARTS DEPARTMENT IMMEDIATELY.

Read these instructions carefully before installing the kit. Keep these instructions for part numbers and for future reference.

#### This kit contains the following:

PART NUMBER	DESCRIPTION	QUANTITY
4270025	LABEL - LOCATE FOOD HERE	1
4273056	STRIP ASSEMBLY - DOOR GASKET - HORIZONTAL	1
4273102	SPACER ASSEMBLY - DOOR GASKET - HORIZONTAL	1
4273104	EXTRUSION COVER ASSEMBLY	8

### Part I. Install door seal strips (See Figure 1):

- 1. Apply the horizontal door gasket spacer assembly (4273102) to the cabinet, below the thermal break. Be sure the top edge of the spacer assembly is aligned with the bottom of the black plastic thermal break and the right edge is aligned with the vertical metallic strip.
- 2. Apply one metallic strip assembly (4273056) to the horizontal door gasket spacer assembly (4273102), below the bottom metallic strip assembly applied in step 5, as shown. Be sure the top edge of the strip is aligned with the bottom of the black plastic thermal break and bottom metallic strip assembly and the right edg

## Part II. Install new extrusion cover assemblies (See Figure 2):

- 1. Remove any decals and foreign material from the metal extrusions between the vend door as shown. It is very important that there be an airtight seal between the extrusion and the extrusion cover.
- Make sure the extrusions are at room temperature. Using isopropyl alcohol, thoroughly clean and dry the surface of the extrusions.

#### **IMPORTANT**

Be sure the extrusions are clean, dry, and at room temperature before continuing.

- Peel the backing from the double-sided tape on the back of the extrusion cover assemblies.
- 4. Align an extrusion assembly with the right side of a metal extrusion, and centered from top to bottom.
- 5. Firmly press the extrusion cover over the extrusion to secure it in place.
- 6. Repeat this step for all remaining extrusions.
- 7. Apply the "LOCATE FOOD HERE" decals to the extrusion covers as shown.

Page 1 of 3 4270043



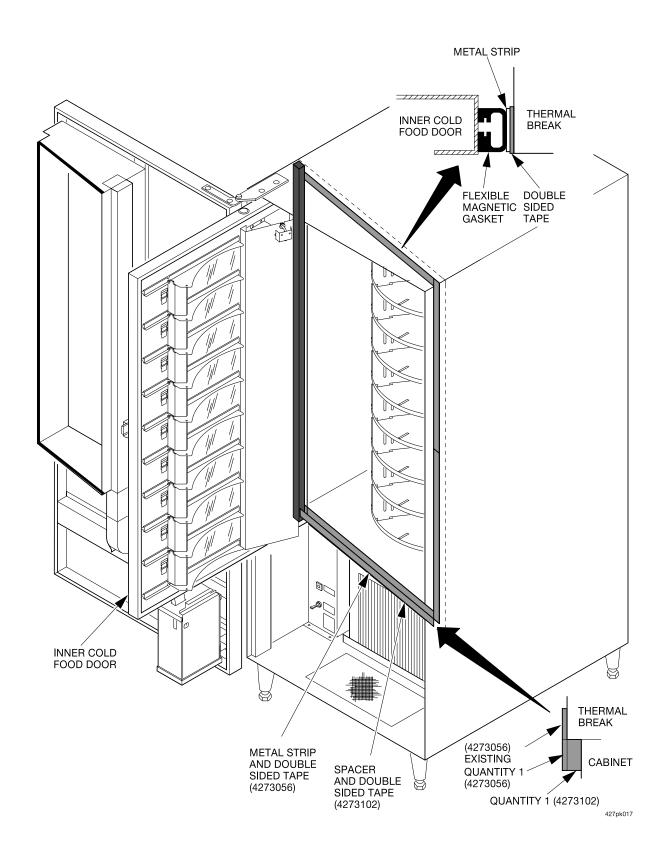


Figure 1



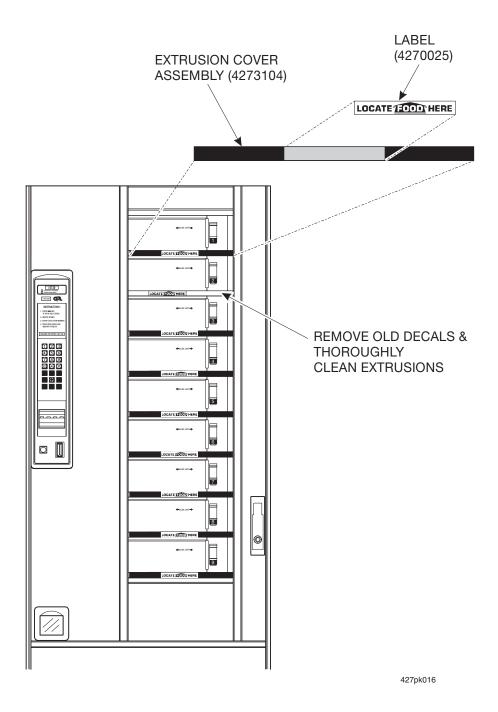


Figure 2

Page 3 of 3 **4270043**